




Mounting	
Suspended fitting	
Body	
in extruded aluminium, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.	
Light emission	
Direct + indirect	
Symmetric	
Optical device	
Direct	Opal polycarbonate diffuser
Indirect	Opal polycarbonate diffuser
Light source	
CRI ≥ 80	
Color tollerance: 3 Step MacAdam	
Lifetime 80000 hrs L80B20	
Wiring	
Class I st	
Power supply 220~240V Ac 50-60 Hz	
Perfomance data	
Protection rate: IP20	
Regulations	
EN 60598-1	
EN 60598-2-1	
Photobiological safety	
EN 62471	
IEC/TR 62778	
Exempt risk – GR 0	
Directives	
2014/35/UE	
2014/30/UE	
UPON REQUEST VERSIONS	
DALI dimmable electronic ballast	
LED CRI ≥ 90	



K	mA	lm IN	lm OUT	W	L	Kg	m³	COD. ELE
3000	350	5136	2935	31,2	1145	8.0	0.014	97083WW1145E0B
4000		5416	3095					97083NW1145E0B
3000		6420	3669	39	1425	10.0	0.018	97083WW1425E0B
4000		6770	3869					97083NW1425E0B

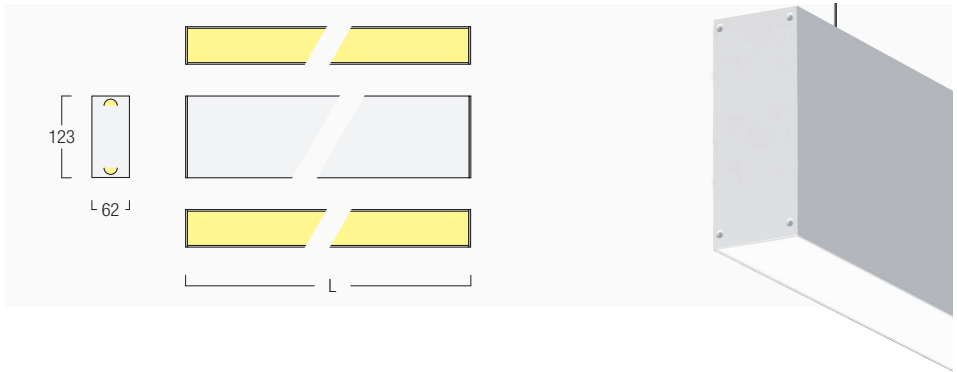