


Mounting
Suspended fitting
Body
in extruded aluminium, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.
Light emission
Direct
Symmetric
Optical device
Opal methacrylate (PMMA) diffuser
Light source
CRI ≥ 80
Color tollerance: 3 Step MacAdam
Lifetime 80000 hrs (L80B20)
Wiring
Class I st
Feeding 220~240V Ac 50-60 Hz
Perfomance data
Protection rate: IP20
Normatives
EN 60598-1
EN 60598-2-1
Photobiological safety
EN 62471
IEC/TR 62778
Exempt risk – GR 0
Directives
2014/35/UE
2014/30/UE
UPON REQUEST VERSIONS
DALI dimmable electronic ballast
LED DRI ≥ 90
Finishes
Colors
golden foil
corten
RAL code



K	Im IN	Im OUT	W	Ø	Kg	m³	cod. ELE
3000	3531	1859	22	600	7.7	0.038	97363WW0600E0B
4000	3729	1963					97363NW0600E0B
3000	5778	3042	36	900	10.4	0.081	97363WW0900E0B
4000	6102	3212					97363NW0900E0B
3000	7704	4056	48	1200	14.5	0.141	97363WW1200E0B
4000	8136	4283					97363NW1200E0B
3000	9630	5070	60	1500	16.9	0.216	97363WW1500E0B
4000	10170	5354					97363NW1500E0B
3000	12198	6422	76	1800	19.6	0.308	97363WW1800E0B
4000	12882	6782					97363NW1800E0B

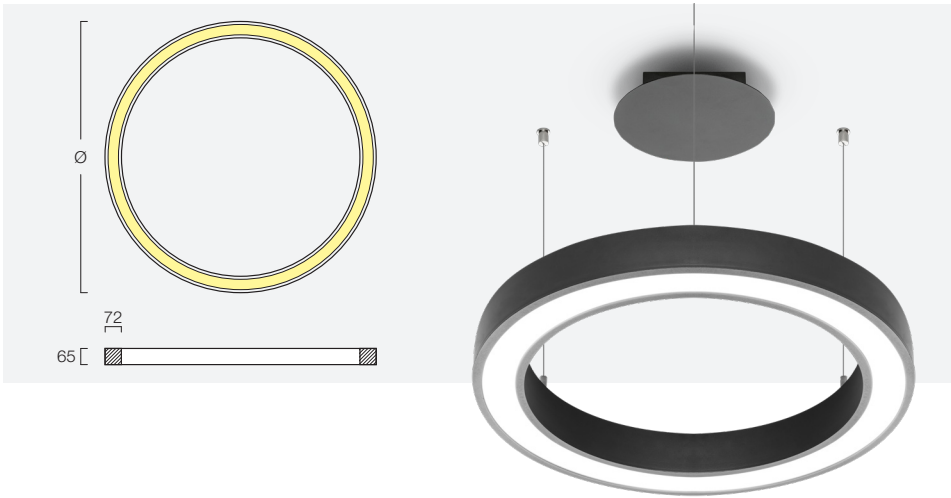