




Mounting
Suspended fitting
Body
in extruded aluminium, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.
Light emission
Direct
Symmetric
Optical device
Opal methacrylate microprismatic diffuser
Light source
CRI ≥ 80
Color tolerance: 3 Step MacAdam
Lifetime 80000 hrs (L80B20)
Wiring
Class I st
Feeding 220~240V Ac 50-60 Hz
Perfomance data
Protection rate: IP20
UGR ≤ 19
Normatives
EN 60598-1
EN 60598-2-1
Photobiological safety
EN 62471
IEC/TR 62778
Exempt risk – GR 0
Directives
2014/35/UE
2014/30/UE
UPON REQUEST VERSIONS
DALI dimmable electronic ballast
LED CRI ≥ 90
Finishes
Colors
golden foil
corten
RAL code



K	lm IN	lm OUT	W	Ø	Kg	m ³	cod. ELE
3000	3531	1559	22	600	7.7	0.038	97413WW0600E0B
4000	3729	1647					97413NW0600E0B
3000	5778	2551	36	900	10.4	0.081	97413WW0900E0B
4000	6102	2694					97413NW0900E0B
3000	7704	3402	48	1200	14.5	0.141	97413WW1200E0B
4000	8136	3592					97413NW1200E0B
3000	9630	4252	60	1500	16.9	0.216	97413WW1500E0B
4000	10170	4490					97413NW1500E0B
3000	12198	5386	76	1800	19.6	0.308	97413WW1800E0B
4000	12882	5688					97413NW1800E0B

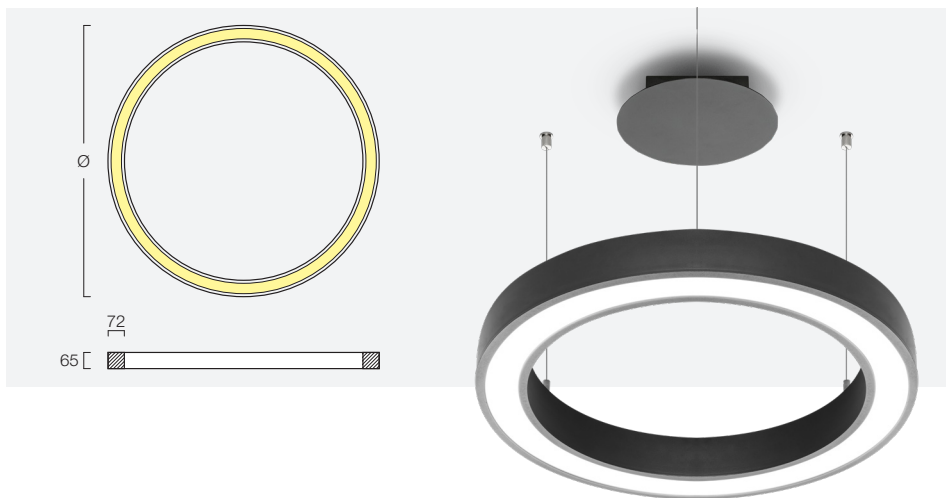