




Mounting	
Suspended	
Body	
in extruded aluminium, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.	
Removable gear tray on which the wiring components are mounted, in extruded aluminium, painted with SOLVENT-FREE, white, thermosetting at 180°C, after phosphate treatment.	
Light emission	
Direct + indirect	
Symmetric	
Optical device	
Direct	Louver Darklight, double parabolic, with top-closed parabolic blades in high-gloss, anodized, antiglare and anti-iridescent aluminium. Glare limitation.
Indirect	Opal polycarbonate diffuser
Light source	
CRI ≥ 80	
Color tollerance: 3 Step MacAdam	
Lifetime 80000 hrs (L80B20)	
Wiring	
Class I st	
Feeding 220~240V Ac 50-60 Hz	
Perfomance data	
Protection rate: IP20	
UGR ≤ 19	
Normatives	
EN 60598-1	
EN 60598-2-1	
Photobiological safety	
EN 62471	
IEC/TR 62778	
Exempt risk – GR 0	
Directives	
2014/35/UE	
2014/30/UE	
UPON REQUEST VERSION	
DALI dimmable electronic ballast	
LED CRI ≥ 90	



K	mA	lm IN	lm OUT	W	L	Kg	m³	COD. ELE
3000	350	3852	2387	23,4	1135	3.0	0.005	98083WW1135E0B
4000		4062	2517					98083NW1135E0B
3000	350	7704	4774	46,8	2265	6.0	0.011	98083WW2265E0B
4000		8124	5034					98083NW2265E0B

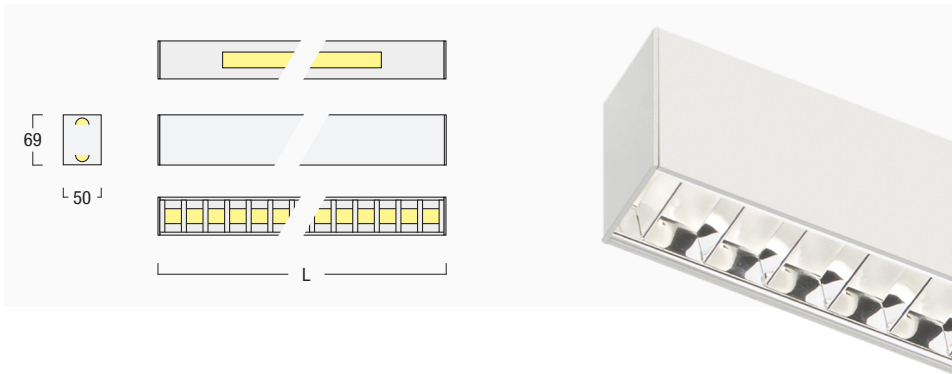