



Mounting

Suspended fitting

Body

in extruded aluminium, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.

Removable gear tray on which the wiring components are mounted, in extruded aluminium, painted with SOLVENT-FREE, white, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.

Aluminium molded end-cap

Light emission

Direct + indirect

Symmetric

Optical device

Direct	Microprismatic methacrylate diffuser
Indirect	Opal polycarbonate diffuser

Light source

CRI > 80

Color tollerance: 3 Step MacAdam

Lifetime 80000 hrs (L80B20)

Wiring

Class 1st

Feeding 220~240V Ac 50-60 Hz

Perfomance data

Protection rate: IP20

UGR < 19

Normatives

EN 60598-1

EN 60598-2-1

EN 60598-2-2

EN 1838

Photobiological safety

EN 62471

IEC/TR 62778

Exempt risk – GR 0

Directives


2014/35/UE

2014/30/UE

UPON REQUEST VERSION

DALI dimmable electronic ballast

LED CRI > 90

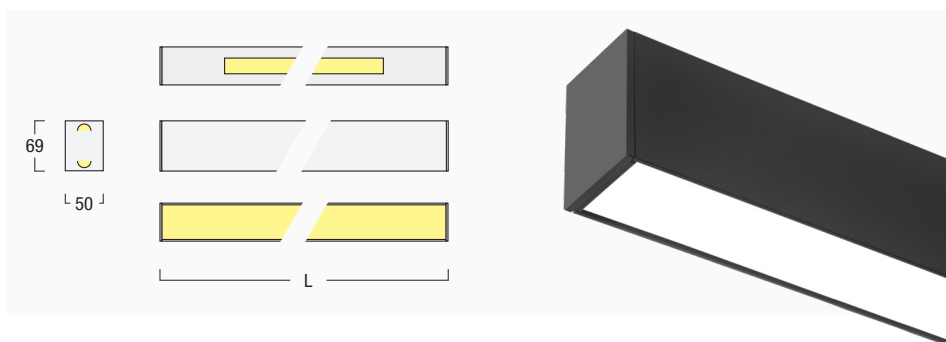

K	mA	Im IN	Im OUT	W	L	Kg	m³	COD. ELE
3000	350	3852	2387	23,4	1135	3.0	0.005	98093WW1135E0B
4000		4062	2517					98093NW1135E0B
3000		4494	2785	27,3	1415	3.8	0.007	98093WW1415E0B
4000		4739	2937					98093NW1415E0B
3000		5136	3183	31,2	1695	4.5	0.008	98093WW1695E0B
4000		5416	3356					98093NW1695E0B
3000		7062	4376	42,9	1975	5.2	0.009	98093WW1975E0B
4000		7447	4615					98093NW1975E0B
3000		7704	4774	46,8	2255	6.0	0.011	98093WW2255E0B
4000		8124	5034					98093NW2255E0B

