


Mounting

Suspended fitting

Body

in extruded aluminium, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.

Removable gear tray on which the wiring components are mounted, in extruded aluminium, painted with SOLVENT-FREE, white, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.

Aluminium molded end-cap

Light emission

Direct + indirect

Symmetric

Optical device

Direct | Opal polycarbonate diffuser

Indirect | Opal polycarbonate diffuser

Light source

CRI $\geq$ 80

Color tolerance: 3 Step MacAdam

Lifetime 80000 hrs (L80B20)

Wiring

Class Ist

Feeding 220~240V Ac 50-60 Hz

Performance data

Protection rate: IP20

UGR $\leq$ 19

Normatives

EN 60598-1

EN 60598-2-1

EN 60598-2-2

EN 1838

Photobiological safety

EN 62471

IEC/TR 62778

Exempt risk – GR 0

Directives


2014/35/UE

2014/30/UE

UPON REQUEST VERSION

DALI dimmable electronic ballast

LED CRI $\geq$ 90

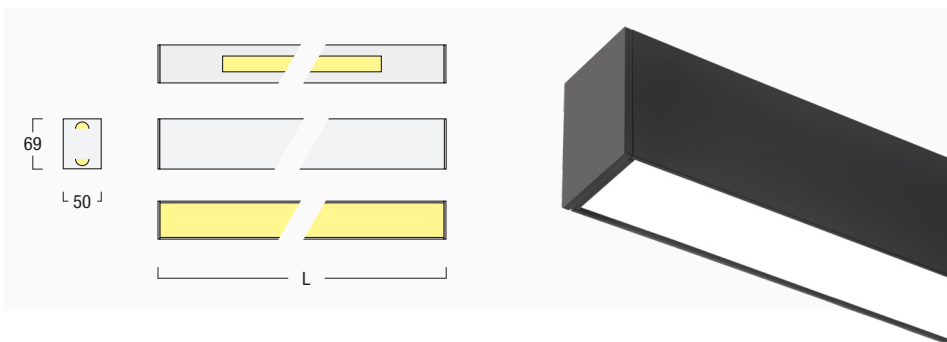

K	mA	lm IN	lm OUT	W	L	Kg	m³	COD. ELE
3000		3852	2041	23,4	1135	3.0	0.005	98203WW1135E0B
4000		4062	2152					98203NW1135E0B
3000		4494	2381	27,3	1415	3.8	0.007	98203WW1415E0B
4000		4739	2511					98203NW1415E0B
3000	350	5136	2721	31,2	1695	4.5	0.008	98203WW1695E0B
4000		5416	2869					98203NW1695E0B
3000		7062	3741	42,9	1975	5.2	0.009	98203WW1975E0B
4000		7447	3945					98203NW1975E0B
3000		7704	4082	46,8	2255	6.0	0.011	98203WW2255E0B
4000		8124	4304					98203NW2255E0B

